



**Stellar-DDS Series Laser**  
*For Dental & Orthodontic Practices*

**Performance Specifications**

Beam Delivery	Fiber Coupled
Beam Amplitude Noise	<15% RMS
Beam Output Power	200mW @ distal end of fiber
Beam Output Power Drift	< +/- 5% (after warm-up)
Warm-up Time	5 Minutes (from cold start)
Start Delay	30 Seconds (approx.)
Line Voltage	120VAC ± 10%
Line Voltage (optional)	220VAC ± 10%
Line Frequency	60/50Hz
Power Consumption	1500 Watts Max.
Dimensions(HxWxL)	5.06" x 7.60" x 13.00" (12.9cm x 19.3cm x 33.0cm)
Weight	13 lbs. (5.9 kg.)
Cooling	Forced Air

The Stellar-DDS Series laser is designed to provide consistent and repeatable performance in bleaching and composite curing applications within general dental practices and bracket bonding in orthodontic practices.

The Stellar-DDS series laser offers one of the most compact packages available in a dental laser and is ideal for offices where space is a premium. In addition to its diminutive size, it is designed to be robust and durable. The maintenance-free sealed mirror laser tube is ruggedly supported for exceptional resistance to vibration and rough handling.

Embedded dual cooling fans, in combination with our exclusive "Dual Channel" air-flow design, provide quiet and highly efficient cooling of the laser tube while isolating the state-of-the-art power supply from potential airborne contaminants.

**Modu-Laser, LLC**


4603 West 8490 South  
 West Jordan, Utah 84088

Phone: (800) 764-2967

Fax: (800) 764-2968

E-Mail: [info@modu-laser.com](mailto:info@modu-laser.com)

[www.modu-laser.com](http://www.modu-laser.com)

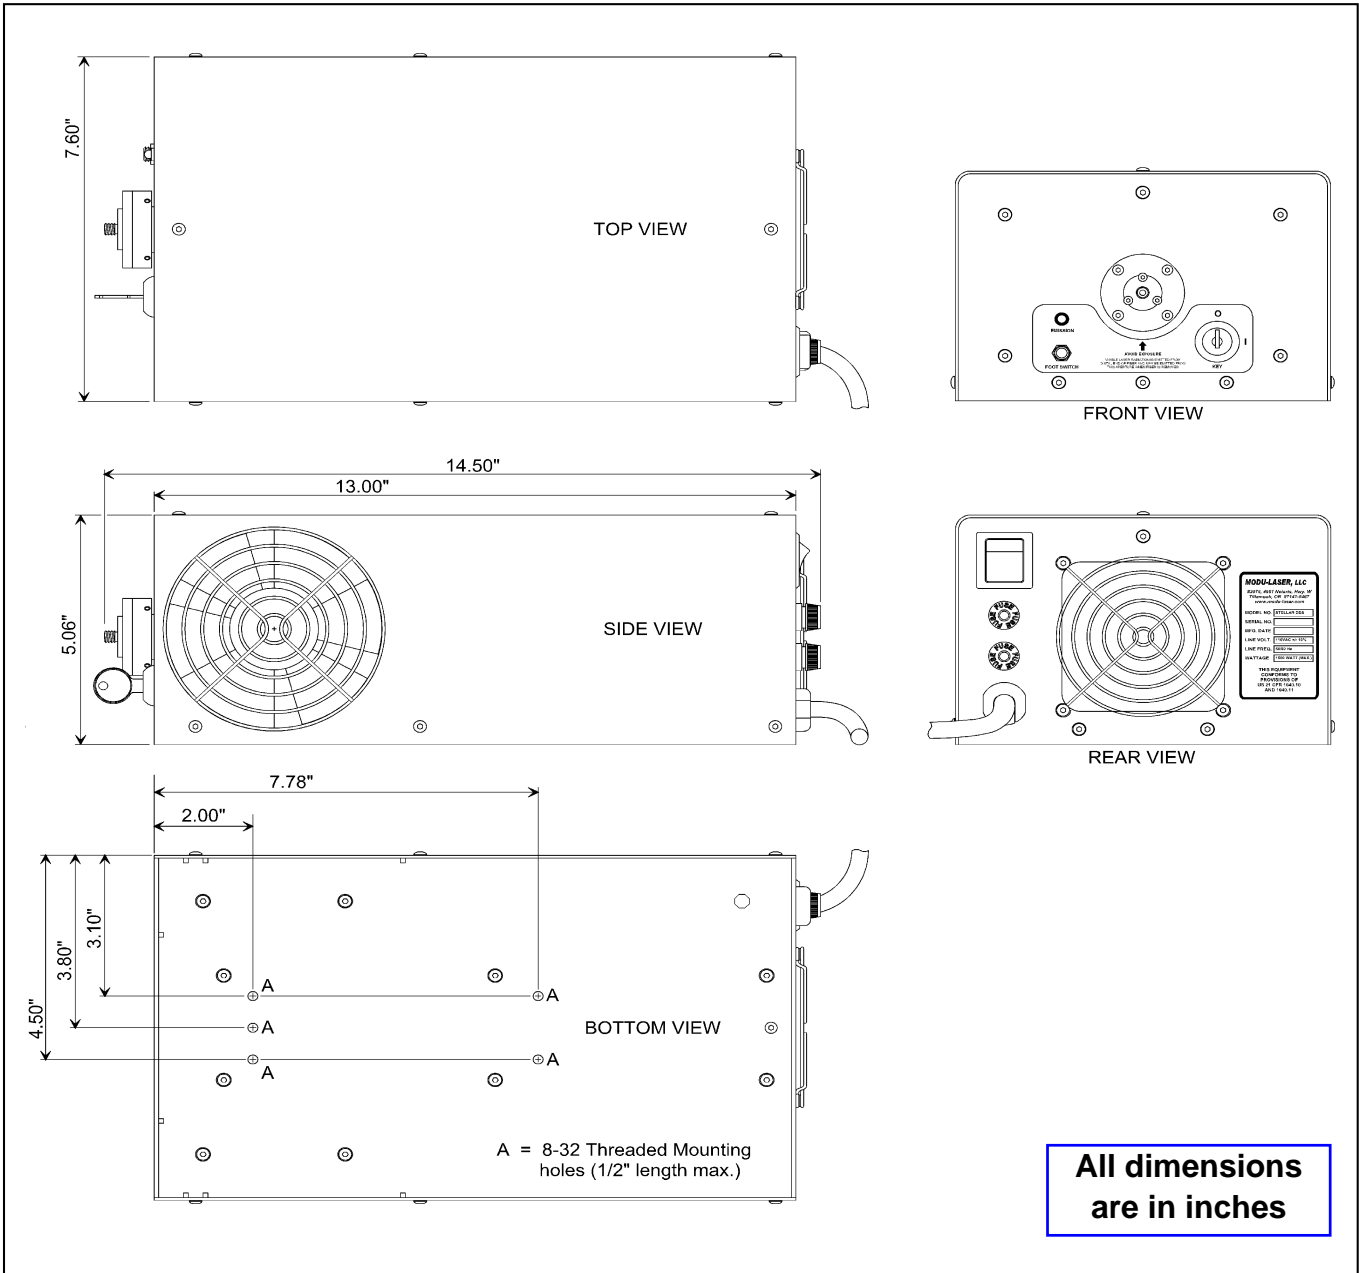

**DANGER**

VISIBLE LASER RADIATION  
CW 300mW Max. (454nm - 700nm)  
AVOID DIRECT EXPOSURE TO BEAM

CLASS IIIB LASER PRODUCT